

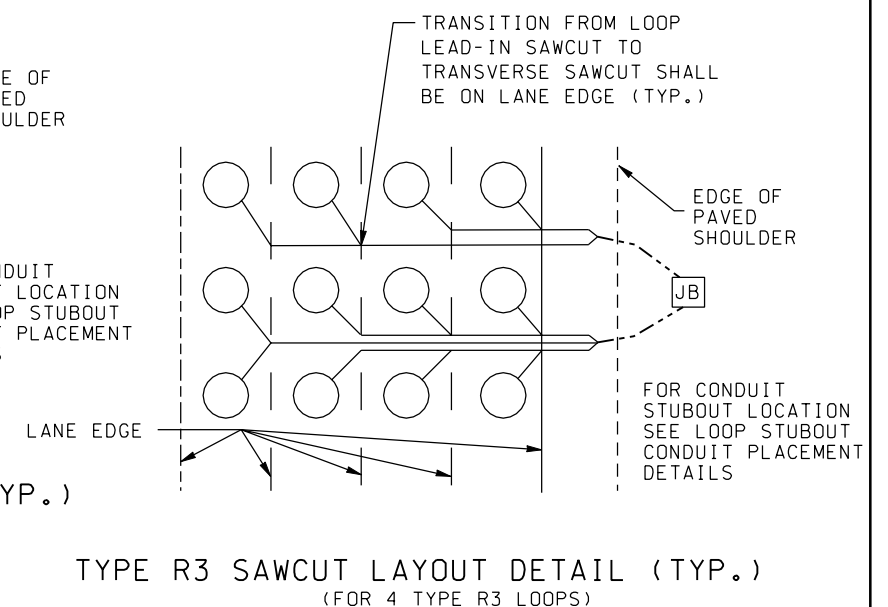
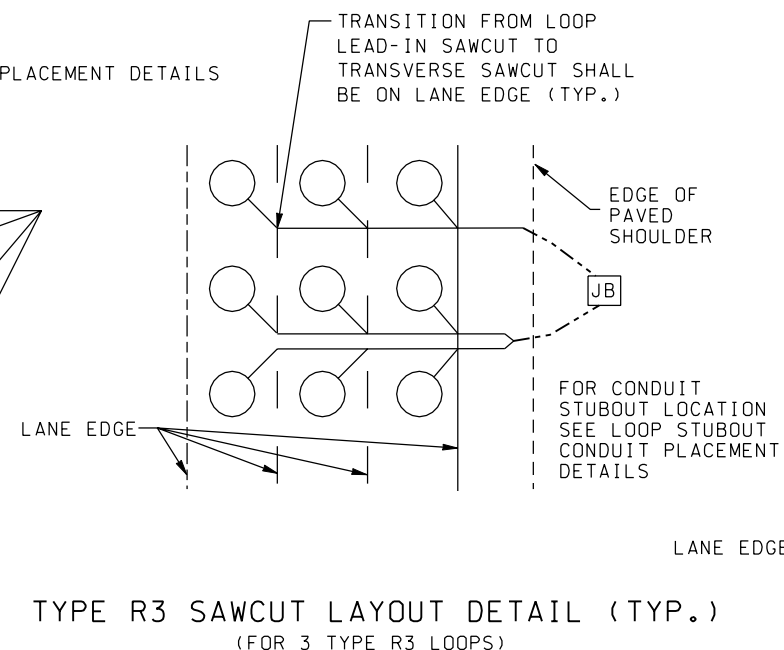




LOOP LEAD PAIRS	1-2	3	4-5	6-8	9-12
CONDUIT SIZE (MIN.)	1	1¼	1½	2	2½

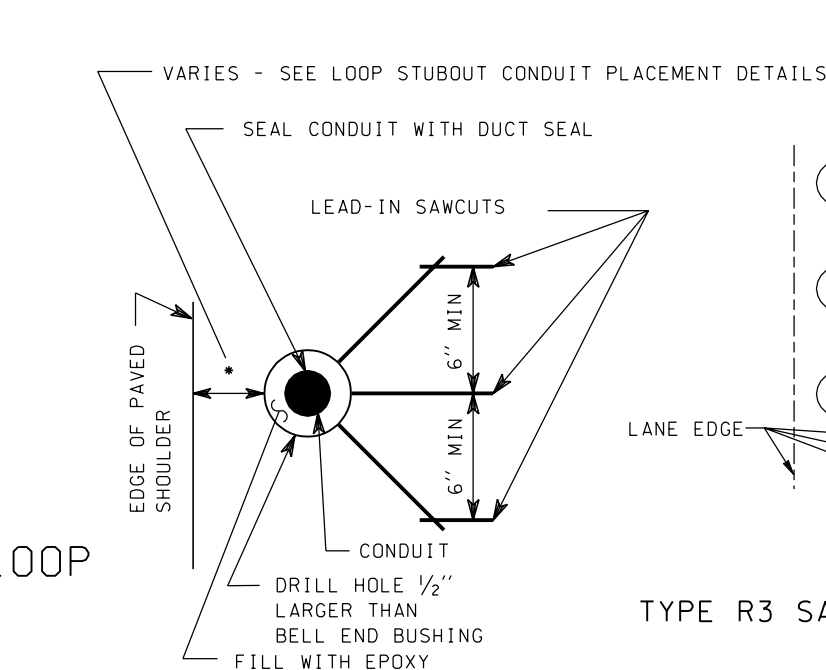


ALL DIMENSIONS ARE IN INCHES  
UNLESS OTHERWISE NOTED.

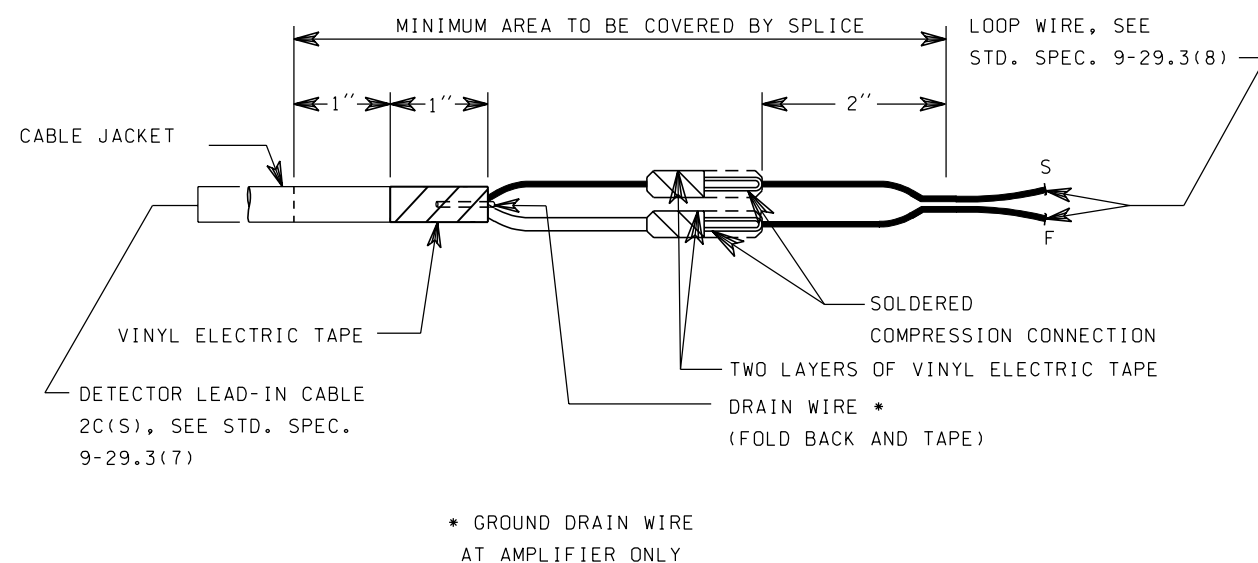

NOTE: SPLICE KITS SHALL BE CENTERED ON CONDUCTORS AND SUFFICIENT SLACK SHALL BE PROVIDED THAT THE SPLICE CAN BE RAISED A MINIMUM OF 18" ABOVE GROUND LINE.

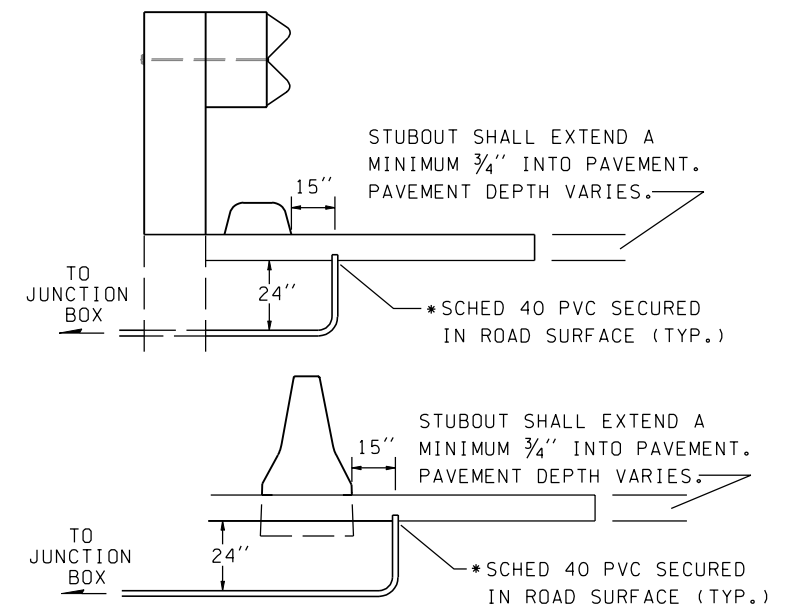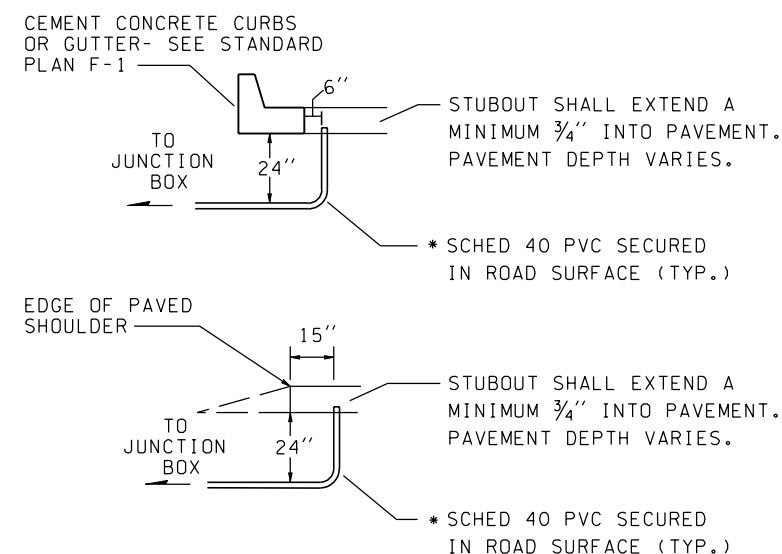

FILE NAME s:\4126\Electrical\MASTER_FILES\DETAILS\loopdet_e.DGN										<div><p>Washington State Department of Transportation</p></div>		ENGLISH		PLOT2	
TIME 06:37:46 AM		SPLICE KIT REMOVED		1-14-03 JH		REGION NO. STATE		FED.AID PROJ.NO.						11.02E	
DATE 01/21/2003		4 TYPE R3 SAWCUT		7-31-00 JH		10 WASH		JOB NUMBER				CONTRACT NO.		LOCATION NO.	
		CORRECTED DRAIN WIRE		1-27-00 JH											
DESIGNED BY		CHNG ELEC PUTTY TO DUCT SEAL		1-3-00 JH								SHEET			
ENTERED BY		PVC CHANGE, TXT EDITS		10-11-99 JH								OF			
CHECKED BY		EDIT TEXT/PK NAIL		9-20-99 JH								SHEETS			
PROJ. ENGR.		NEW DETAIL		8-2-99 JH											
REGIONAL ADM.		REVISION		DATE		BY									